



Specification

Nominal size

DN20

Tank connection

3/4" BSPT (taper)

Set pressure

From 5 PSI to 225 PSI (0.34 Bar to 15.52 Bar)

Materials

Contact parts: 304 stainless steel

Pressure O ring: Viton GFLT

Alternatives are available, refer to Range

Design Conditions

Weight:	0.6 Kg
Design Pressure (MAWP):	16.5 Bar
Design Temperature Min:	-40°C
Design Temperature Max:	200°C



NOTE: The minimum re-seal temperature is -25°C.
The Design Conditions and Section View dimensions are for the specified part number only.

Range


Description	Part No.
Standard specification	58/0XXX00

NOTE: The pressure setting changes the Part No.

Section View



Parts Drawing

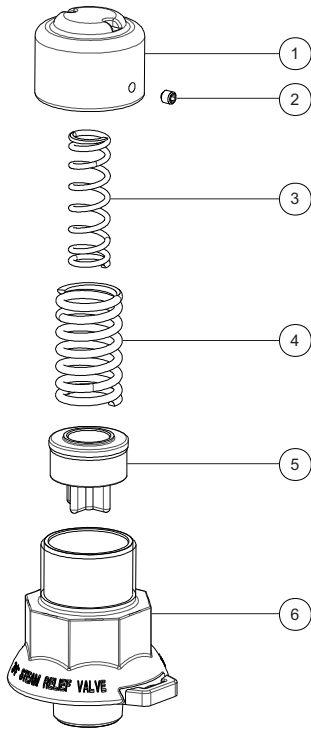

Parts List

Item	Description	Part No.
1	Cap	58/03650
2	Set screw	5121-001
3	Inner spring *Note	5104-90XX
4	Outer spring *Note	5104-9XXX
5	Poppet assembly with Viton GFLT seal *Note	58/0362X
6	Body	58/03640

NOTE: The pressure setting changes the Part No.